


PIEZO ELECTRIC BUZZER
(BUZZER TYPE :PZ-1-20)

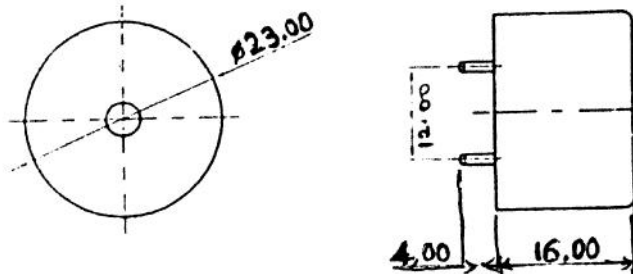

ELECTRICAL SPECIFICATIONS

- | | |
|----------------------------|---|
| i. TYPE | PCB MOUNTABLE |
| ii. IN PUT VOLTAGE | 1.5 to 24V DC |
| iii. OPERATING TEMPERATURE | -20 TO +70°C |
| iv. STORAGE TEMPERATURE | -30 TO +80°C |
| v. SOUND PRESSURE LEVEL | (A) 110 @ 2.4V
(B) 90 dB @ 2.4V (MEASURED AT 30 CM FROM SOURCE).
(C) 75 dB @ 2.4V |
| vi. OSCILLATION FREQUENCY | 2.7 KHz. |
| vii. CURRENT CONSUMPTION: | Maximum 38mA AT 24V DC |
| viii. MATERIAL: | Bottom cover : ABS black
Top shell: ABS black
Pin : Brass square pin (Hot Tin dipped) |

confidential

ALL DIMENSIONS ARE IN MM DO NOT SCALE DRAWING DO NOT ASSUME DIMENSIONS	TOLERANCE SYSTEM H7 H8 H9	SCALE 1 : 1	PARAMOUNT ELECTRONICS (P) LTD	REV	2003 02 27	SRIWASS S
			Buzzer TYPE :PZ-1-20.	CHK	2003 02 27	NANDA KUMARAP
					APPD	2003 02 27
						PE-D008-30