




S14D


Only
23 mm
WIDE

Socket for P14 [7A]
DIN Rail or Panel Mountable

Wiring Diagram

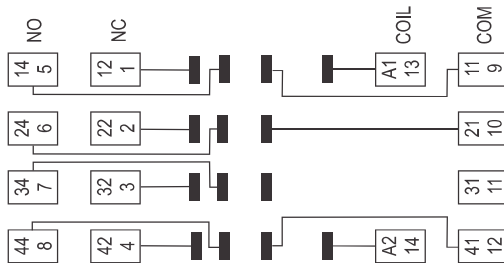

Dimensions in mm.

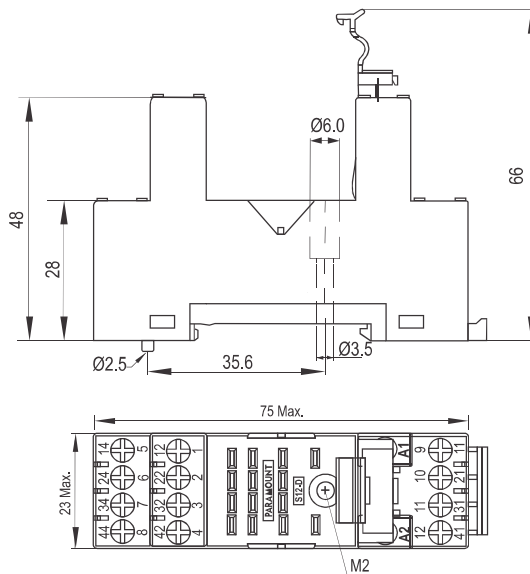


Accessories



S14D-B1

Dimensions in mm.

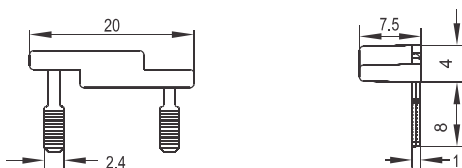

S14D-B1, 10A @ 250 VAC, 1 Way Bridge for Coil

Specifications

Poles 4 Change Over Contact
Nominal load : 7A / 250 VAC

Insulation: Di-electric strength, 1minute

Between contact and coil 2.5 KV

Between all terminals and DIN Rail 2.5 KV

Between adjacent terminals 2.5 KV

Max. screw torque 1.2 Nm

Screw dimensions M3, Pozi

Wire in-lets capacity:

Solid Wire 4 mm or 2 x 2.25 mm

Multi core 22 14 AWG

Ferrule tip terminals 4 mm

Weight Approx. 61 gms.

Other Aspects

DIN Rail / Panel Mountable

EN / DIN Sequential Numbering according to

EN 60947 & IEC 61810

Integrated Relay Hold Down Clip

Removable White Marking Label

Hard Brass Tin Plated Terminals

Brass Tin Plated Screw

Accessories

Bridge S14D-B1 for Coil Terminal

Approvals

