

# S2LD-A

**Input / Output Socket (6A / 8A)  
for P2 NO Relays  
DIN Rail or Panel Mountable**

Only  
**16mm**  
WIDE

## Specifications

Poles: 2 Normally Open Contact  
Nominal load: 6A / 8A @ 250V


**Insulation:** Di- electric strength, 1munitu  
Between contact and coil: 5 KV  
Between all terminals and DIN Rail: 5 KV  
Between adjacent terminals: 3 KV

1.2 Nm  
Brass Tin Plated Screw: M3, Pozi


Max. Screw torque  
Screw dimensions: 4 mm<sup>2</sup> or 2 x 2.25 mm<sup>2</sup>  
22 14 AWG

**Wire in-lets capacity:**  
Solid wire: 4 mm<sup>2</sup>  
Multi core: 38 gms.  
Ferrule tip terminals

Weight Approx.  
DIN Rail / Panel Mountable  
Integrated Relay Hold Down Clip  
Removable White Marking Label  
EN / DIN Sequential Numbering according to  
EN 60947 & IEC 61810

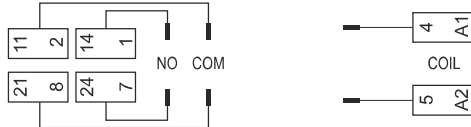

## Dimensions in mm.

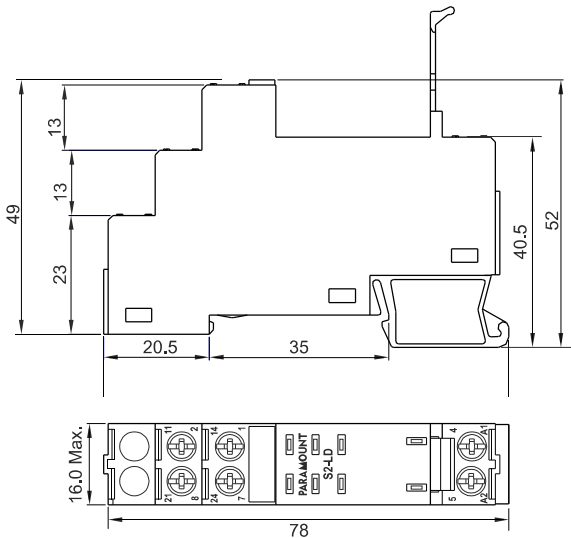

## Accessories



**S2LD-B1**




**C Terminal**

## Accessories

S2LD-B1 - 1 Way Bridge

Fork / C - Terminal for wire connection

## Dimensions in mm.

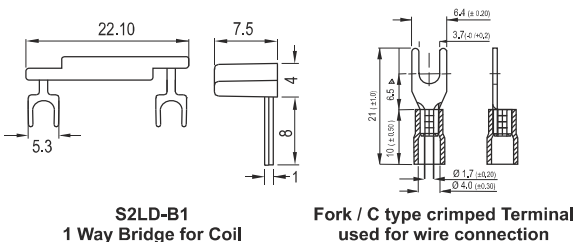

**S2LD-B1**  
1 Way Bridge for Coil

**Fork / C type crimped Terminal**  
used for wire connection

## Approvals

