




S8D-X

Only
38 mm
WIDE

**Socket DIN Rail or Panel Mountable
for P3 1NO + 1NC Relay**

Wiring diagram

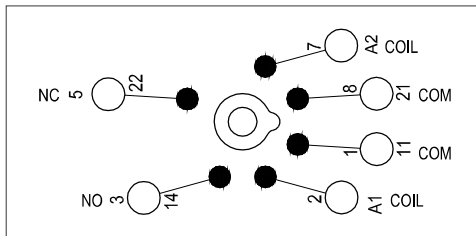

Specifications

Poles: 1 NO + 1NC Contact (8pins)
Nominal load : 10A / 250V



Insulation: Di-electric strength, 1minute
Between contact and coil: 2.5 KV
Between all terminals and DIN Rail: 2.5 KV
Between adjacent terminals: 2.5 KV

Max. screw torque: 0.5 Nm
Screw dimensions: M3, Pozi

Wire in-lets capacity:
Solid Wire: 4sq mm or 2 x 2.25 mm
Multi core: 22 14 AWG
Ferrule tip terminals: 4 mm sq

Weight Approx. 47 gms.

Dimensions in mm

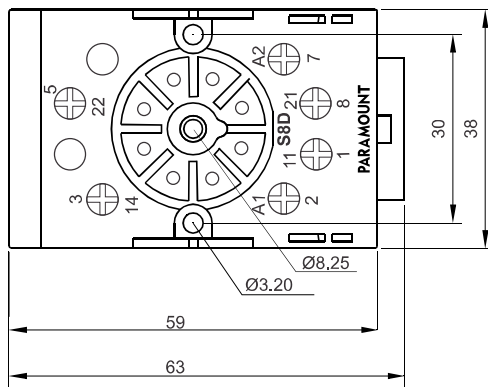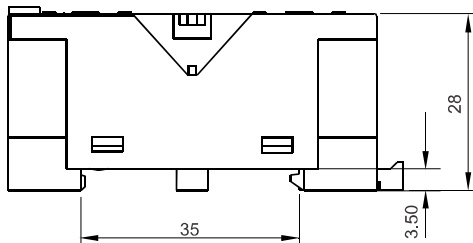

Other Aspects

DIN Rail / Panel Mountable
EN / DIN Sequential Numbering according to EN 60947 & IEC 61810
Integrated Relay Hold Down Clip
Removable White Marking Label
Hard Brass Tin Plated Terminals
Brass Tin Plated Screws

Approvals

