



OR-ING DIODE UNIT

Model No.:P-OR-24-20



Model No.:P-OR-48-20

General Information

The OR-ing unit combines two or more power sources to create redundant power source preserving the output power supply in case one of the input source fails. In this situation of input power failure, the next power supply feeds the power quickly to prevent the system bus voltage from failing & bus collapse. 1 N/C relay contacts brought out for the each power supply failure alarm.

Dimensions

in mm.

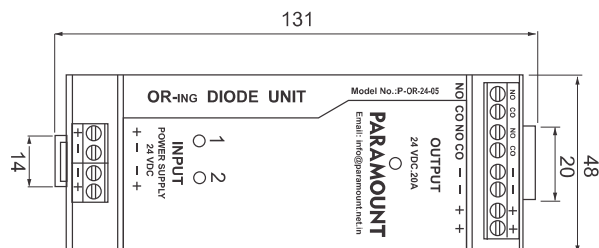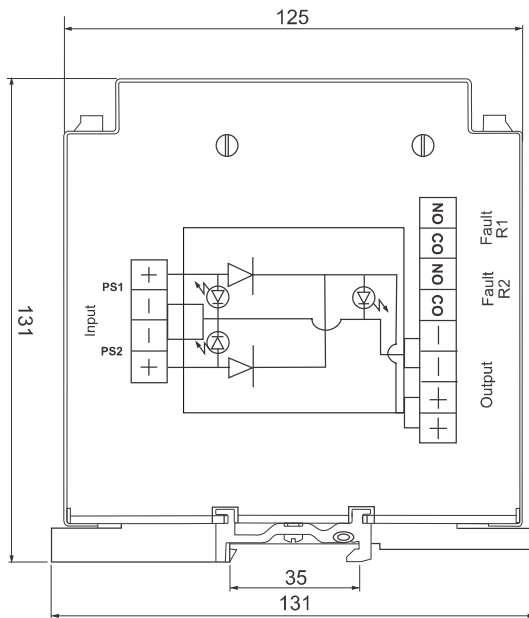

Specifications

Input - 24V DC supply -2nos (standard)
- 48V DC supply -2nos (standard)

Output current

Model No.	Current Rating	Voltage
P-OR-24-20	20 Amps	24VDC
P-OR-48-20	20 Amps	48VDC

Overload -10%max.

Drop -0.65 volts max DC at 20A

Di-Electric strength -1KV AC
(between input / output to body)

Insulation resistance -100 mega Ohm @ 500 VDC min.
(between input / output to body)

Working Temperature -55°C Ambient max.

Indicators :

Input power supply -1 green LED for each power supply

Output power supply -1 green LED for output

output -1N/C Relay Contact
Rated 5Amps @ 24VDC/230VAC
incase of failure of any one of the
input power supply.

Conductor cross section -0.20 - 4.0 mm² solid
0.20 - 2.5 mm² stranded
AWG 24-12

Dimension (LxBxH)mm -131 x 48 x 131

Mounting -35mm DIN Rail

Weight -1.2Kg.Approx

Custom built OR ing units can be designed and built to suit the special requirements.

Approvals