




**Dimensions in mm.**

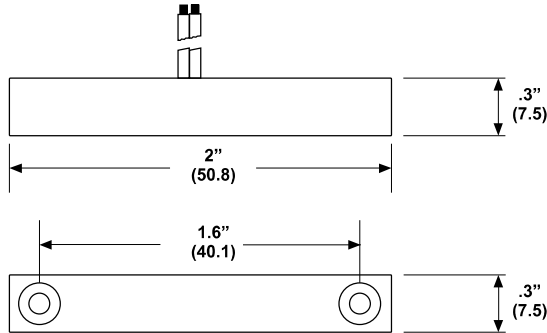

(Dimensions in brackets are in mm)

# P 156

**Surface Mount**  
**Screw mount with leads**

**Specifications**

- Easy screw mount
- Mounting screws included
- Wide operating gap


Ordering Information	Gap Size	Loop	Lead Type
P 156	3/4" (19.1 mm)	Closed	#22 AWG WIRE 18" (450mm) LONG

**Reed Switch Specification :-**

Contact Type : Normally Open Switch N/O Contacts (Form 'A') [standard] [Form 'B'-N/C OR Form 'C' -C/O contact type are given on request]  
 Contact Resistance : 100m ohms Max.  
 Contact Rating : Switching current 0.4 Amps  
 Max. Carry Current : 1A,  
 Power consumption : 10 VA  
 Max. Switching Voltage : 100 VDC  
 Life Expectance : 10 million operations



**Dimensions in mm.**

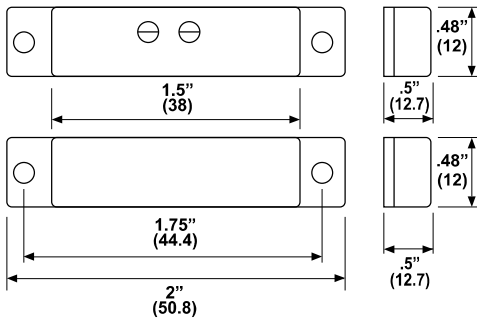

(Dimensions in brackets are in mm)

# P 157 ST

**Surface Mount**  
**Miniature surface mount**

**Specifications**

- Low height
- Convenient, screw terminal connections
- Tape or screw mounting
- Mounting screw & paper sticker for covering the screws included

Ordering Information	Gap Size	Loop	Lead Type
P 157	5/8" (15.9 mm)	Closed	SCREW TERMINAL

**Reed Switch Specification :-**

Contact Type : Normally Open Switch N/O Contacts (Form 'A') [standard] [Form 'B'-N/C OR Form 'C' -C/O contact type are given on request]  
 Contact Resistance : 100m ohms Max.  
 Contact Rating : Switching current 0.4 Amps  
 Max. Carry Current : 1A,  
 Power consumption : 10 VA  
 Max. Switching Voltage : 100 VDC  
 Life Expectance : 10 million operations