


# P3-N-2



**General Purpose 2 C/O Contacts**  
**10 A 250V AC1 0.5 A 110V DC1**  
**10 A 30V DC1 0.2 A 220V DC1**

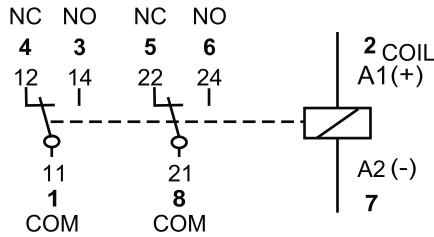

## Contacts


Materials : Standard  
 Optional 1 AgNi  
 Optional 2 AgNi + Au 0.2 μ  
 AgNi + Au 5.0 μ

Max. Switching Current 10A  
 Max. Peak Inrush Current (20 ms) 30A  
 Max. Switching Voltage 250 VAC  
 Switching Power range 0.3 VA (W) to 2500 VA  
 Max. Contact Resistance 20m Ω  
 Max. AC Load (Table 1) 2.5 KVA  
 Max. DC Load (See Table 2) -


**Coils (Ohms ± 10% @ 20°C)**  
 Pull-in Voltage ≤ 0.8xUn  
 Drop-out Voltage 0.1xUn  
 Nominal Coil Power 2.5 VA (AC / 1.3 W (DC))

VAC	Ohms	VDC	Ohms
6	3.15	6	33
12	13.3	12	115
24	52	24	480
48	240	48	1850
110	1120	110	9000
230	5600	220	29000


**Graph 1** Electrical life, ops x 10<sup>6</sup>

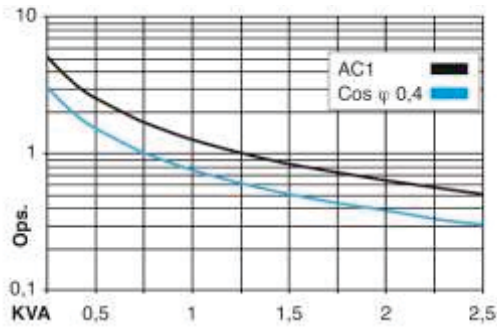

**Graph 2** Max. DC load

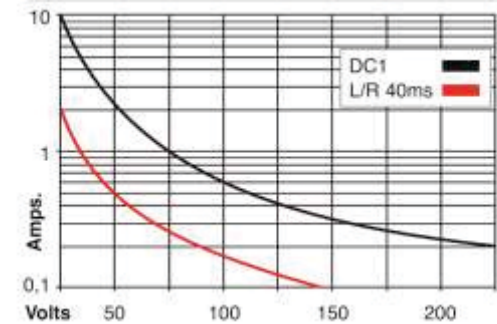

## Dimensions in mm.

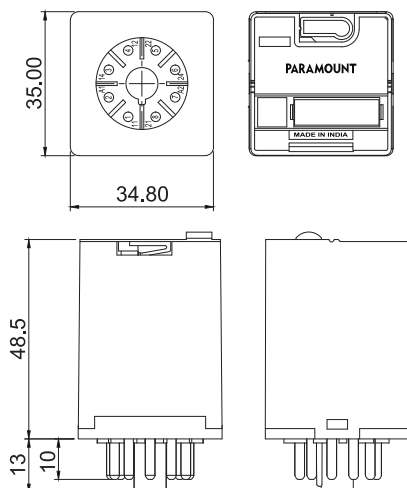

## Insulation

Dielectric Strength (1 minute) : open contacts 1500 VAC  
 Between adjacent poles 2000 VAC  
 Between contacts and coil 2500 VAC  
 Insulation Resistance @ 500VDC Min. ≥ 200 MΩ  
 Isolation, IEC 61810-5 2.5 KV / 3

## Specifications

Operate / Release & Bounce Time Max. for DC +3 / 3.5+ ms  
 Operate / Release & Bounce Time Max. for AC 9+8 / 12+16 ms  
 Mechanical Life ops. 10 Million AC, 20 Million DC relays  
 Electrical life at Nominal load ≥ 100,000 ops.  
 Operating Frequency at nominal load 1200 / hour  
 Shock Resistance AK : > 10g  
 Vibration Resistance 5g 10.....150 Hz  
 Mounting Direction any  
 Storage -40°C to +85°C  
 Ambient Operating Temperature -40°C to +55°C (for AC relay)  
 Ambient Operating Temperature -40°C to +70°C (for DC relay)  
 Protection Standard IP 40  
 Weight app. 80 g

## Standard Types

**AC : 6, 12, 24, 48, 110, 230**  
 F = Mechanical Flag Indicator  
 P = LED Indicator  
 I = Lockable Push Button  
 R = RC Snubber circuit (115 or 230V)

**DC : 6, 12, 24, 48, 110, 220**  
 F = Mechanical Flag Indicator  
 P = LED  
 I = Lockable Push Button  
 W = Free Wheeling Diode  
 Z = Polarity & Free Wheeling Diode  
 B = AC/DC Bridge Rectifier (24/48V)

<b>P3-N-2-F</b>	.... VAC
<b>P3-N-2-FP</b>	.... VAC
<b>P3-N-2-FPI</b>	.... VAC
<b>P3-N-2-FIR</b>	.... VAC
<b>P3-N-2-F</b>	.... VDC
<b>P3-N-2-FP</b>	.... VDC
<b>P3-N-2-FPI</b>	.... VDC
<b>P3-N-2-FPIW</b>	.... VDC
<b>P3-N-2-FPZI</b>	.... VDC
<b>P3-N-2-FPIB</b>	.... VDC

## Suitable Sockets : S8D, S8LD

## Approvals

