


# S14ED



Only  
**29.6 mm**  
WIDE

## DIN Rail or Panel Mountable Socket

### Wiring Diagram

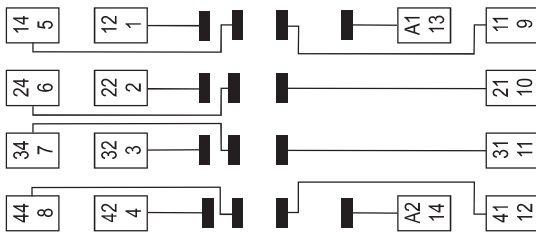

### Dimensions in mm.

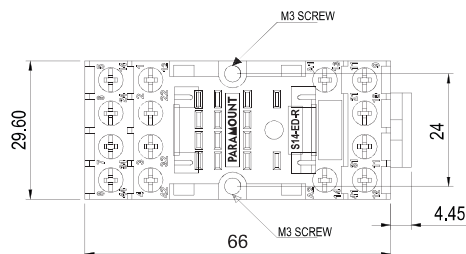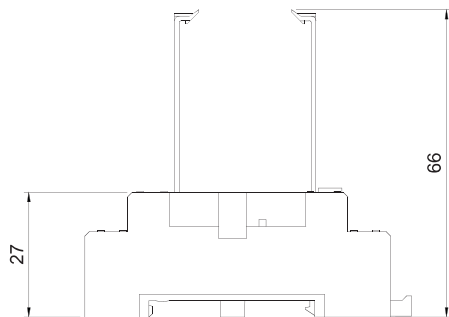

### Specifications

Poles 4 Change Over Contact  
Nominal load : 5A / 250 VAC

**Insulation:** Di-electric strength, 1minute

Between contact and coil	2.5 KV
Between all terminals and DIN Rail	2.5 KV
Between adjacent terminals	2.5 KV

Max. screw torque	0.6 Nm
Screw dimensions	M3, Pozi
Weight Approx.	46 gms.


### Other Aspects

DIN Rail / Panel Mountable  
EN / DIN Sequential Numbering according to  
EN 60947 & IEC 61810  
Integrated Relay Hold Down Clip  
Removable White Marking Label

### Accessories

Fork / C - Terminal for Wire connection (Only 1 No to be use)

### Accessories



Fork / C type crimped Terminal  
used for wire connection

Suitable Sockets : P14, P14E, P14H, P14S, P14L, P14L2

### Approvals

