




Alarm Unit Hooter / Siren / Buzzer / Bell

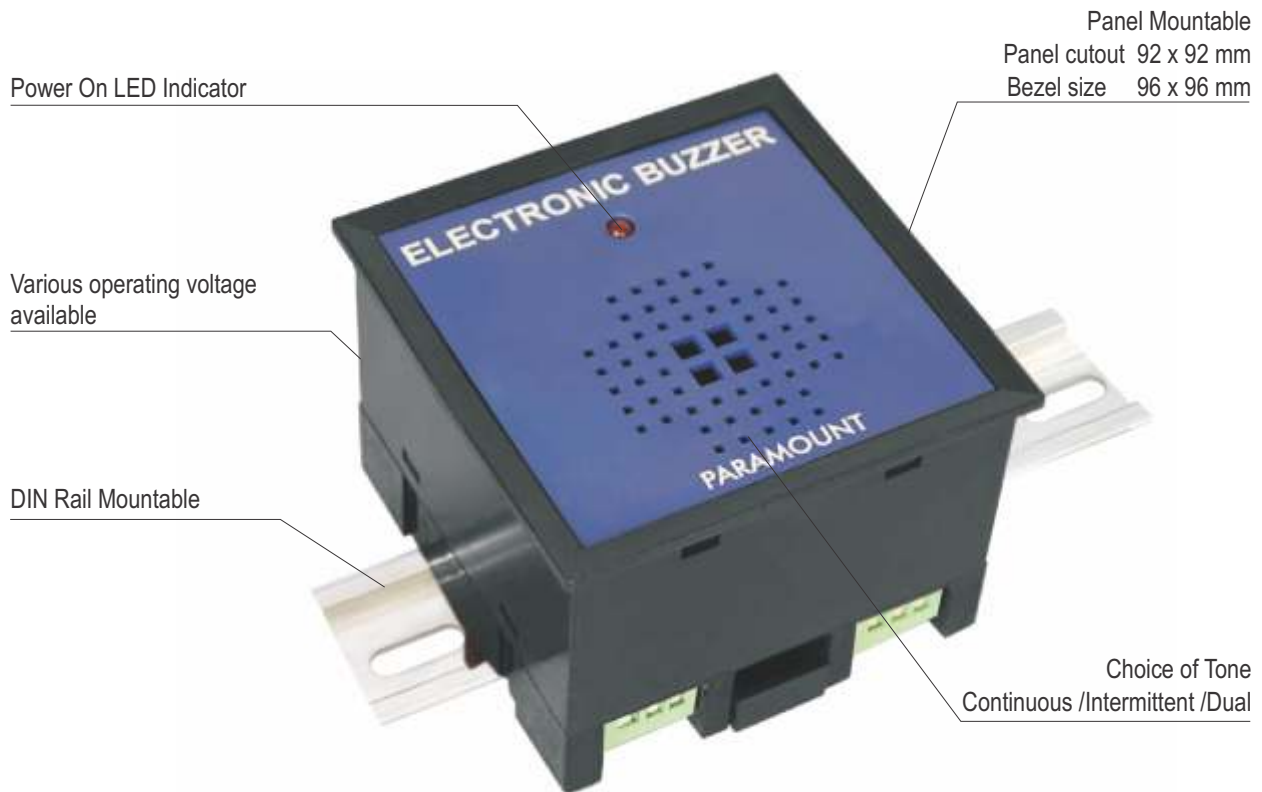

DIN Rail Mounting

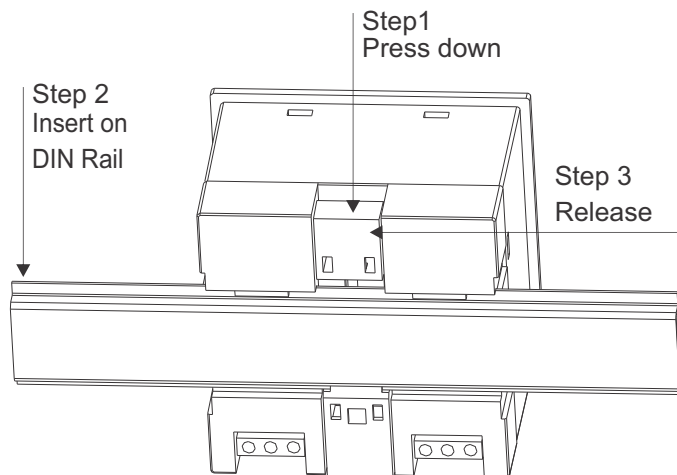

Panel Mounting

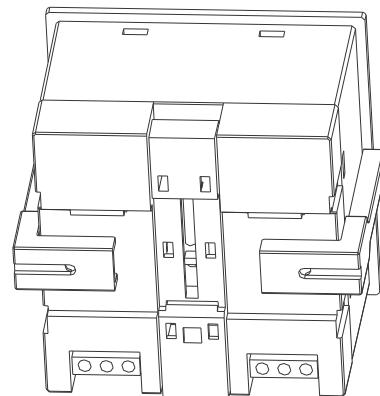

* to remove from DIN Rail follow Step 1 and pull out of DIN Rail

User Instructions


1. Connect supply at terminal 1,2 or 2,3 = X OR 1 & 2 = Y as per the operating voltage being
2. Following are the details of terminals to be shorted for the selection of various types of Tones
 - 4 & 5 shorted, Tone 1 will be selected
 - 5 & 6 shorted, Tone 2 will be selected
 - 4 & 6 shorted, Tone 3 will be selected
3. DIN Rail Mounting, Panel Mounting brackets are provided and it can be mounted as shown above in the figure.

Note :

1. In the process of continuous product improvement dimensions & specifications may change from time to time without prior intimation.
2. For special version contact factory.

Dimensions


in mm.

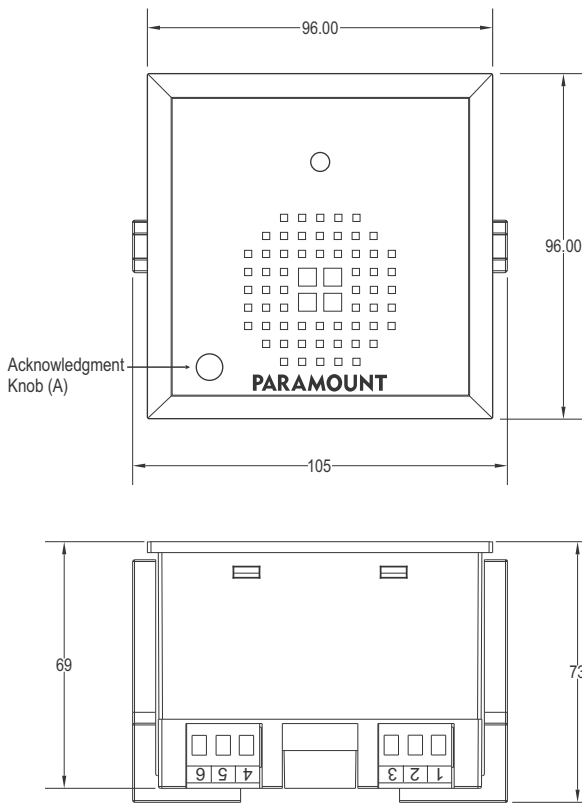

Specification

Operating Voltage	1. 80 - 140 VAC/DC	1. 10 - 18 VAC/DC
	2. 110 - 240 VAC/DC	2. 20 - 30 VAC/DC
	3. 160 - 280 VAC/DC	3. 48 - 60 VAC/DC
	4. 110 - 240 VAC/DC-A	
Environmental Protection	Ip40	
Power Consumption	5 watts Max.	
Weight	230 gms Max.	
Standard Sound Level	100 db @ 1mtr \pm 5%	
Available tones	Hooter, Buzzer, Bell, Siren	
Panel Cutout	92mm x 92mm	
Mounting Type	35mm DIN Rail & Panel Mountable	
Power ON Indicator	5mm Red LED	
Operating Temperature range	+10°C to +70°C	
Dimension	96 x 96 x 73mm	
Connection	Screw type terminal block	
Wire Size	0.2 to 4mm ² for solid 0.2 to 2.5mm ² for stranded	

Ordering Information

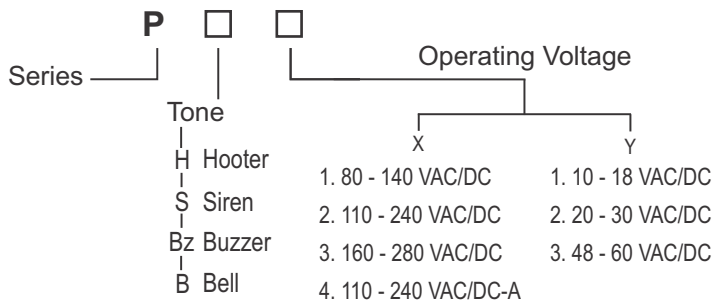

Ordering Example: P H X 3 means Tone: Hooter with operating voltage 160-280 VAC/DC

P H X 4 means Tone: Hooter with operating voltage 110-240 VAC/DC-A with acknowledgment knob

Terminal Wiring Diagram



Caution : While changing the tone at terminal 4/5/6 please disconnect supply to Hooter to avoid electrical shock hazard.

PARAMOUNT
EXPECT MORE...

Paramount Electronics (P) Ltd.

B-107, KSSIDC Industrial Estate, Rajajinagar
Bangalore - 560 010, India.

Tel : +91 80 2297 0015, 2315 7851

Fax : +91 80 2315 7726

Email : info@paramount.net.in

Website : www.paramount.net.in