



P2-A...M




MAGNETIC BLOW OUT


Two Pole, Normally Open Contact

6A 250V AC1 4A 220V DC1


6A 30V DC1 1A 220V DC13



Graph 1 Electrical life, ops x 10⁶

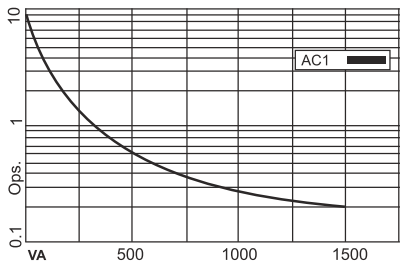


Graph 5

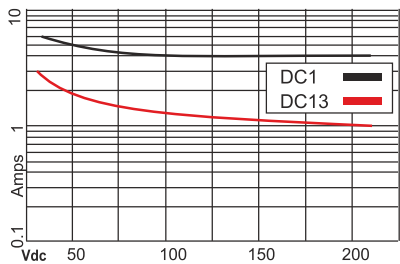

Dimensions

in mm.

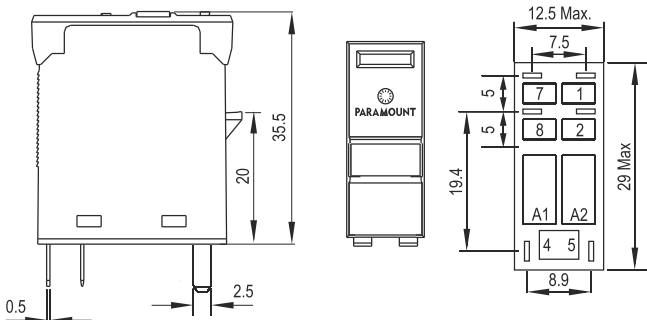

Contacts

Materials: Standard	AgNi
Optional, code 1	AgNi + Au 0.2μ
Optional, code 2	AgNi + Au 5.0μ
Max. switching current	6 A
Max. Peak inrush current (20 ms.)	15 A
Max. Switching voltage	250 V
Max. AC load (Graph 1)*	1.5 KVA
Max. DC load	See Graph 5*

Coils (Ohms ± 10% @ 20°C)

Pull-in voltage	≤ 0.8 x Un
Drop-out voltage	≥ 0.1 x Un
Nominal coil power	1.1 VA (AC) / 0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45.0	12	224	53.0
48	1.200	23.0	24	742	32.0
115	7.300	9.5	48	3.500	13.7
230	28.800	4.7	110	19.900	5.5

Insulation

Dielectric strength (1 minute):	
Open Contacts	1 KV
Between Adjacent Poles	3 KV
Between Contacts & Coil	5 KV
Insulation resistance at 500VDC	>3GΩ
Isolation, IEC 61810-5:	4 KV / 3

Specifications

Operate Time + Bounce Time	10 ms.
Release Time + Bounce Time	8 ms.
Ambient Temperature	-40°C (no ice)... +70°C
Mechanical life ops.	10 Million AC, 20 Million DC relays
Electrical life at nominal load	> 100,000 ops.
Operating frequency at nominal load	1,200 / hour
Protection grade	IP40 / RT1
Weight Approx.	21 gms.

Standard types

AC : 6, 12, 24, 48, 115, 230	P2A-FP-M VAC
DC : 6, 12, 24, 48, 110, 220	P2A-FPZ-M VDC
F = Mechanical Flag Indicator	
P = LED Indicator across the Coil	
Z = Polarity and Free Wheeling Diode	
M = Magnetic Blow Out	

Suitable Sockets : S2D, S2LD, S2P

Approvals

